


All Sequencers are OEM
Approved for Safety and Reliability



- Direct Replacement for Most Fan & Heat Sequencing Functions
- 24 Volt Input Control
- Contacts Designated M1-M2 of a Multi-timing Sequencer will Turn On First and Turn Off Last, as Required by UL® for Electric Heating Applications
- Five Second on Delay Between all Subsequent Stages, Unless they Function Together

AL101, AL109 & AL116

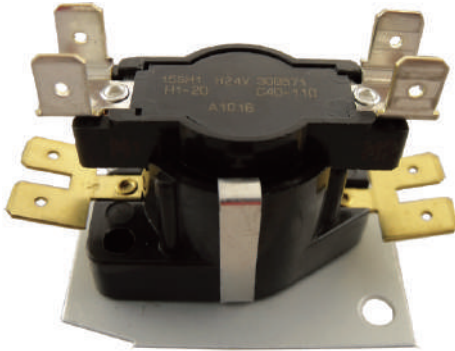

AL101 OFF 40-110 Sec.
ON 1-20 Sec.
AL109 OFF 40-110 Sec.
ON 20-50 Sec.
AL116 OFF 1-45 Sec.
ON 1-60 Sec.

AL104 & AL110




AL104 OFF 1-30 Sec.
ON 30-90 Sec.
AL110 OFF 30-50 Sec.
ON 10-30 Sec.

AL102




OFF 1-30 Sec.
ON 30-90 Sec.

AL105




OFF 1-110 Sec.
ON 1-110 Sec.

AL103 & AL113



AL103 OFF 40-110 Sec.
ON 1-20 Sec.
AL113 OFF 15-65 Sec.
ON 30-10 Sec.
AL113 Has 240 Volt Heater



OFF 1-110 Sec.
ON 1-110 Sec.

AL108




OFF 65-115 Sec.
ON 1-25 Sec.

AL111



OFF M1-M2 90-160 Sec.
ON M1-M2 10-40 Sec.
OFF M3-M4 30-60 Sec.
ON M3-M4 10-30 Sec.

AL107



OFF 40-110 Sec.
ON 1-20 Sec.

AL112



OFF M1-M2 90-150 Sec.
ON M1-M2 10-3 Sec.
OFF M3-M4 30-60 Sec.
ON M3-M4 10-30 Sec.
OFF M5-M6 30-60 Sec.
ON M5-M6 10-30 Sec.

AL114



OFF 15-25 Sec.
ON 15-45 Sec.

AL115



OFF 1-45 Sec.
ON 1-60 Sec.

*Note all sequencers include a 24 volt heater, except the AL113 which has a 240 volt heater.

LONGTERM ®											
Part No.	SUPCO ®	GEM ®	Global ®	Mars ®	Watsco ®	Klixon ®	WR ®	Robershaw ®	Interstate Electric ® 1-9	Zetler ®	OEM
AL101	Q101	GS101	24CZ-1	33241	TDR10	6000AONI-98	24A34-1	611-241	IES24A34-1	ZC24A34-1	Goodman ® B1290906
		***	***	33841	***	***	24A34-7	***	***	***	Lennox ® 12F20 & 58C9701
		***	***	***	***	***	24A34-13	***	***	***	York ® 525-37322-000
AL102	Q102	GS102	24CZ-2	33242	TDR15	6000AONI-97	24A34-2	611-242	IES24A34-2	ZC24A34-2	Carrier ® 40CF680020
		***	***	33842	***	***	***	***	***	***	***
AL103	Q103	GS103	24CZ-3	33244	TDR20	6000AONI-87	24A34-3	611-244	IES24A34-3	ZC24A34-3	ICP ® / Carrier ® HN67QC005
		***	***	33844	***	6000EO-102	***	***	***	***	ICP ® / Carrier ® HQ1056789
		***	***	***	***	***	***	***	***	***	Goodman ® BT1256504
AL104	Q104	GS104	24CZ-4	33245	TDR25	6000E049	24A34-4	611-245	IES24A34-4	ZC24A34-4	York ® 525-37325-000
		***	***	33845	***	***	***	***	***	***	ICP ® / Carrier ® HN67QC006
		***	***	***	***	***	***	***	***	***	***
AL105	Q105	GS105	24CZ-5	33232	TDR30	51172-32	24A34-5	611-232	IES24A34-5	ZC24A34-5	York ® 525-37327-000
		***	***	33832	***	***	24A34-54	***	***	***	Coleman ® 3120A357
AL106	Q106	GS106	24CZ-6	33233	TDR35	51172-33	24A34-6	611-233	IES24A34-6	ZC24A34-6	ICP ® / Carrier ® HN67QC008
		***	***	33833	***	***	***	***	***	***	ICP ® / Carrier ® P284-1313
AL107	Q107	GS107	24CZ-14	33848	***	51172-35-1	24A34-14	611-007	IES24A34-14	ZC24A34-14	York ® 525-37328-000
AL108	Q108	GS108	***	***	***	6000C0-27	***	***	***	***	Goodman ® B13707-38
		***	***	***	***	***	***	***	***	***	ICP ® / Carrier ® HN67GJ002
AL109	Q109	***	***	***	***	***	***	***	***	***	Janitrol ® BT1256500
AL110	Q110	***	***	***	***	***	***	***	***	***	Weatherking ® 4223115608
AL111	Q111	***	***	***	***	***	***	***	***	***	Weatherking ® 4223115606
AL112	Q112	***	***	***	***	***	***	***	***	***	Weatherking ® 4223115607
AL113*	Q113*	***	***	33265	***	6000E4-40	***	***	***	***	***
AL114	Q114	***	***	***	***	***	***	***	***	***	Coleman ® 7670-307, 7670-308 7670-130, 7670-913, 7670-101
		***	***	***	***	***	***	***	***	***	***
AL115	Q115	***	***	33246	***	6000EOM	24A52-1	***	***	**	Coleman ® 3120A3771
AL116	Q116	***	***	33243	***	6000AOM	24A51-1	***	***	***	Coleman ® 3110-354



GENERAL PURPOSE LIMITS AL & ALD SERIES

- Open on Rise
- Close when Temperature Differential is Reached
- 1/4" Quick Disconnect Terminals
- Use 60T Electrical Ratings

60T ELECTRICAL RATING:
TYPICAL ELECTRICAL RATINGS TEMP RANGE: -40°F TO 350°F

Volts (VAC)	Resistive (Non-Inductive)	Motor Rating (Inductive)		
		Full Load	Locked Rotor	Pilot Duty
120	25A	14A	72A	125VA
240	25A	10A	60A	125VA

350°F Max Ambient Temperature

"AL" SERIES, SINGLE POLE- SINGLE THROW STYLE



Part No.	°Diff.	Open (°F)	Close (°F)	SUPCO®	Part No.	°Diff.	Open (°F)	Close (°F)	SUPCO®
AL120	10	120	110	L120	AL190	40	190	150	L190
AL125	10	125	115	L125	AL200	40	200	160	L200
AL130	15	130	115	L130	AL205	40	205	165	L205
AL135	15	135	120	L135	AL225	40	225	185	L225
AL140	20	140	120	L140	AL240	40	240	200	L240
AL145	20	145	125	L145	AL250	40	250	210	L250
AL150	20	150	130	L150	AL260	40	260	220	L260
AL155	20	155	135	L155	AL270	40	270	230	L270
AL160	20	160	140	L160	AL290	40	290	250	L290
AL165	20	165	145	L165	AL300	40	300	260	L300
AL170	20	170	150	L170	AL320	40	320	280	L320
AL175	20	175	155	L175	AL340	40	340	300	L340
AL180-20	20	180	160	L180-20					
AL180-40	40	180	140	L180-40					

"ALD" SERIES SINGLE POLE-DOUBLE THROW STYLE



Part No.	Description	Open (°F)	Close (°F)	Diff.	SUPCO®
ALD120	SPDT Thermostats	120	105	15	LD120
ALD135	SPDT Thermostats	135	120	15	LD135
ALD140	SPDT Thermostats	140	120	20	LD140
ALD145	SPDT Thermostats	145	125	20	LD145
ALD155	SPDT Thermostats	155	135	20	LD155
ALD170	SPDT Thermostats	170	150	20	LD170
ALD200	SPDT Thermostats	200	160	40	LD200
ALD225	SPDT Thermostats	225	185	40	LD225
ALD270	SPDT Thermostats	270	230	40	LD270

ADJUSTABLE ALT SERIES



- Series Covers Almost 95% of Heater and Dryer Applications
- Dial Knob
- 40° Adjustable Range
- 1/4" Quick Connect Terminals
- Use 60T Electrical Ratings

OPEN ON TEMPERATURE ADJUSTABLE THERMOSTATS STYLE

Part No.	Adjustable Range (°F)	Adjustable Range (°F)	Diff.	SUPCO®
ALT012	135	175	20	AT012
ALT013	175	215	40	AT013
ALT014	210	250	40	AT014
ALT015	250	290	40	AT015

CLOSE ON TEMPERATURE ADJUSTABLE AIRFLOW THERMOSTATS STYLE 74T11

Part No.	Adjustable Range (°F)	Adjustable Range (°F)	Diff.	SUPCO®
ALT021	90	130	20	AT021
ALT022	140	180	20	AT022



60T ELECTRICAL RATING:
TYPICAL ELECTRICAL RATINGS TEMP RANGE: -40°F TO 350°F

Volts (VAC)	Resistive (Non-Inductive)	Motor Rating (Inductive)		
		Full Load	Locked Rotor	Pilot Duty
120	25A	14A	72A	125VA
240	25A	10A	60A	125VA

350°F Max Ambient Temperature

FAN CONTROL* CLOSE ON RISE STYLE



Part No.	Description	Cut Out (°F)	Cut In (°F)	Diff.	SUPCO®
ALF90	Fan	80	90	10	SHF90
ALF110	Fan	90	110	20	SHF110
ALF110DC	Fan - Deep Cup	90	110	20	SHF110DC
ALF120	Fan	110	120	10	SHF120
ALF140	Fan	120	140	20	SHF140
ALF250	Fan	220	250	30	SHF250

*Adapter Flange Plate included with each thermostat.

LIMIT CONTROL* OPEN ON RISE STYLE



Part No.	Description	Cut Out (°F)	Cut In (°F)	Diff.	SUPCO®
ALL120	Limit - Open on Rise	120	110	10	SHL120
ALL140	Limit - Open on Rise	140	100	40	SHL140
ALL150	Limit - Open on Rise	150	110	40	SHL150
ALL160	Limit - Open on Rise	160	120	40	SHL160
ALL170	Limit - Open on Rise	170	130	40	SHL170
ALL180	Limit - Open on Rise	180	140	40	SHL180
ALL190	Limit - Open on Rise	190	150	40	SHL190
ALL200	Limit - Open on Rise	200	160	40	SHL200
ALL230	Limit - Open on Rise	230	190	40	SHL230
ALL250	Limit - Open on Rise	250	210	40	SHL250

*Adapter Flange Plate included with each thermostat.

MANUAL RESET LIMIT CONTROL* OPEN ON RISE STYLE



Part No.	Description	Open (°F)	Close	SUPCO®
ALM125	Limit - Open on Rise	125	Manual	SHM125
ALM130	Limit - Open on Rise	130	Manual	SHM130
ALM160	Limit - Open on Rise	160	Manual	SHM160
ALM170	Limit - Open on Rise	170	Manual	SHM170
ALM180	Limit - Open on Rise	180	Manual	SHM180

Part No.	Description	Open (°F)	Close	SUPCO®
ALM200	Limit - Open on Rise	200	Manual	SHM200
ALM210	Limit - Open on Rise	210	Manual	SHM210
ALM290	Limit - Open on Rise	290	Manual	SHM290
ALM350	Limit - Open on Rise	350	Manual	SHM350

*Adapter Flange Plate included with each thermostat.

HVAC FLUSH MOUNT STAGING THERMOSTATS STYLE



Part No.	Description	Open (°F)	Close (°F)	Diff.	SUPCO®
AFL60	HVAC Staging Thermostat	60	45	15	FL60




36T ELECTRICAL RATING:
TYPICAL ELECTRICAL RATINGS TEMP RANGE: -40°F TO 350°F

GAS FURNACE LIMITS AND PLENUM THERMOSTATS


- Direct OEM Replacements
- Economical
- Use 36T Electrical Ratings
- Style 36TX01B
- 350°F Max Ambient Temperature

Volts (VAC)	Resistive (Non-Inductive)	Motor Rating (Inductive)		
		Full Load	Locked Rotor	Pilot Duty
120	15A	3A	12A	125VA
240	10A	1.5A	6A	125VA

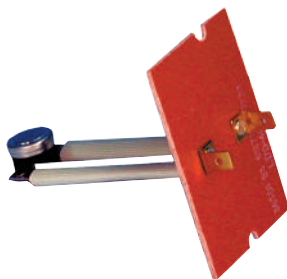

Part No.	Description	Open	Close	Diff.	Board Width	Board Height	Insertion Length	SUPCO®
AHL501	L170-40 SPST	170°	130°	40°	1.88"	2.8"	3.12"	SHL501
AHL502	L180-30 SPST	180°	150°	30°	1.88"	2.8"	3.12"	SHL502
AHL503	L190-40 SPST	190°	150°	40°	1.88"	2.8"	3.12"	SHL503
AHL504	L240-40 SPST	240°	200°	40°	1.88"	2.8"	3.12"	SHL504
AHL505	L140-40 SPST	140°	100°	40°	1.88"	2.8"	1.87"	SHL505
AHL506	L170-40 SPST	170°	130°	40°	1.88"	2.8"	1.87"	SHL506
AHL507	L140-30 SPST	140°	110°	30°	1.88"	2.8"	3.12"	SHL507
AHL508	L190-20 SPST	190°	170°	20°	1.88"	2.8"	3.12"	SHL508
AHL509	L240-30 SPST	240°	210°	30°	1.88"	2.8"	3.12"	SHL509
AHL510	L150-20 SPST	150°	130°	20°	1.625"	1.44"	3.12"	SHL510
AHL511	L160-20 SPST	160°	140°	20°	1.625"	1.44"	3.12"	SHL511
AHL512	L170-20 SPST	170°	150°	20°	1.625"	1.44"	3.12"	SHL512
AHL513	L170-40 SPST	170°	130°	40°	1.88"	2.94"	3.12"	SHL513
AHL514	L180-40 SPST	180°	140°	40°	1.88"	2.94"	3.12"	SHL514
AHL515	L200-40 SPST	200°	160°	40°	1.88"	2.94"	3.12"	SHL515
AHL516	L210-40 SPST	210°	170°	40°	1.88"	2.94"	3.12"	SHL516
AHL517	L220-50 SPST	220°	170°	50°	1.88"	2.94"	3.12"	SHL517
AHL518	L250-40 SPST	250°	210°	40°	1.88"	2.94"	3.12"	SHL518
AHL519	L155-30 SPST	155°	125°	30°	1.88"	2.8"	7.12"	SHL519
AHL520	L100-20 SPST	100°	80°	20°	1.88"	2.8"	7"	SHL520
AHL521	L200-20 SPST	200°	180°	20°	1.88"	2.8"	7"	SHL521
AHL522	L160-20 SPST	160°	140°	20°	1.88"	2.8"	7"	SHL522
AHL523	L130-20 SPST	130°	110°	20°	1.88"	2.8"	7"	SHL523
AHL524	L170-20 SPST	170°	150°	20°	1.88"	2.8"	7"	SHL524
AHL525	L180-20 SPST	180°	160°	20°	1.88"	2.8"	7"	SHL525

TH181955 THERMOCOUPLE

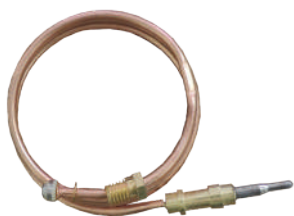

- Designed to meet or exceed OEM specifications
- Single wire, metric thread
- Used on Vanguard® Units
- 24"
- Fits Gas Log Fireplaces

TH181975 THERMOCOUPLE



- Designed to meet or exceed OEM specifications
- Single wire, metric thread
- Used on York® and Nordyne® units
- 39"

GAS FURNACE LIMITS AND PLENUM THERMOSTATS CROSS REFERENCE

Part No.	Carrier [®] , Bryant [®] , BDP [®] , Day & Night [®] , Payne [®]	Janitrol [®] , Goodman [®] , Amana [®] , GMC [®]	Lennox [®] , Air-Ease [®] , Armstrong [®] , Concord [®] , Magic Chef [®] , SUPCO [®]	Corsair [®] , Rheem [®] Ruud [®] , Weather King [®]	Trane [®]	York [®]
AHL501	HH12ZA174A HH127A176A P331-2203		SHL501	47-21711-06		025-29041-007
AHL502	HH12ZA178A	B1370001	SHL502			
AHL503	HH12ZA189 HH12ZB190 HH12ZA193A P331-2205		SHL503	47-21711-03		025-29041-012
AHL504	HH12ZA240 HH12ZA252A P331-2217		SHL504			
AHL505	HH12ZB140		SHL505			
AHL506	HH12ZB170		SHL506		SWT1258	
AHL507	HH12ZA140		87F16 SHL507			025-29041-005
AHL508	HH12ZB190 HH12ZA193 HH12ZA189 P331-2005	B1370913	SHL508		SWT1260	
AHL509	HH12ZB240 HH12ZA240 HH12ZA252 P331-2217	B1370903	SHL509			
AHL510	HH12ZB150		SHL510			
AHL511	HH12ZB160		SHL511			025-29041-004
AHL512	HH12ZB170		26H66 SHL512			
AHL513			37H73 SHL513			
AHL514	HH12ZB180		49L03 SHL514			025-29031-711
AHL515	HH12ZB200 HH12ZA199 HH12ZA201		SHL515			025-29041-006
AHL516	HH12ZB210		SHL516		SWT1263	
AHL517	HH12ZB220 HH12ZA219 HH12ZA223 48NHT042 620BE		SHL517		SWT1273	
AHL518	HH12ZB250 HH12ZA251 P331-2208	B1370012S	SHL518		SWT1261 SWT1272	
AHL519		B1370006	SHL519			
AHL520			SHL520	47-21711-01		
AHL521			SHL521	47-21711-04		
AHL522		B1370908S	SHL522	47-21711-07		
AHL523			SHL523	47-21711-08		
AHL524			SHL524	47-21711-10		
AHL525			SHL525	47-21711-11		



ROLLOUT SWITCHES

- Auto and Manual Reset
- Offered in a Broad Temperature Range to Cover Most Heating Applications

36T ELECTRICAL RATING:
TYPICAL ELECTRICAL RATINGS TEMP RANGE: -40°F TO 350°F

Volts (VAC)	Resistive (Non-Inductive)	Motor Rating (Inductive)		
		Full Load	Locked Rotor	Pilot Duty
120	15A	3A	12A	125VA
240	10A	1.5A	6A	125VA

350°F Max Ambient Temperature

**SMALL FLUSH MOUNT SPST LIMIT THERMOSTATS STYLE
(FLUSH MOUNT AUTOMATIC ROLLOUT)**



Part No.	Terminals	Cut Out (°F)	Cut In (°F)	Diff.	SUPCO®
ALF210HA	Horizontal 1/4"	210	170	40	SLF210HA
ALF222VA	Vertical 1/4"	222	182	40	SLF222VA
ALF230HA	Horizontal 1/4"	230	190	40	SLF230HA
ALF250HA	Horizontal 1/4"	250	200	50	SLF250HA

AUTOMATIC ROLLOUTS SPST LIMIT THERMOSTATS STYLE



Part No.	Terminals	Cut Out (°F)	Cut In (°F)	Diff.	SUPCO®
ALS140	45° angle 1/4"	140	100	40	SLS140
ALS150	45° angle 1/4"	150	110	40	SLS150
ALS160	45° angle 1/4"	160	120	40	SLS160
ALS170	45° angle 1/4"	170	130	40	SLS170
ALS180	45° angle 1/4"	180	140	40	SLS180
ALS200	45° angle 1/4"	200	160	40	SLS200
ALS300	45° angle 1/4"	300	250	50	SLS300

MANUAL ROLLOUTS SPST LIMIT THERMOSTATS STYLE



Part No.	Terminals	Cut Out (°F)	Cut In (°F)	SUPCO®	Part No.	Terminals	Cut Out (°F)	Cut In (°F)	SUPCO®
ARL130	Vertical 1/4"	130	Manual	SRL130	ARL250	Vertical 1/4"	250	Manual	SRL250
ARL135	Vertical 1/4"	135	Manual	SRL135	ARL260	Vertical 1/4"	260	Manual	SRL260
ARL220	Vertical 1/4"	220	Manual	SRL220	ARL300	Vertical 1/4"	300	Manual	SRL300
ARL230	Vertical 1/4"	230	Manual	SRL230	ARL350	Vertical 1/4"	350	Manual	SRL350
ARL240	Vertical 1/4"	240	Manual	SRL240					


SRL SERIES CROSS REFERENCE

Part No.	Replace	Replaces
ARL130	Rheem®/Ruud Weatherking® 47-22453-01 Supco® SRL130	
ARL135	Rheem®/Ruud Weatherking® 47-22453-02 Supco® SRL135	
ARL220	Nordyne® 626354 Supco® SRL220	
ARL230	Nordyne® 626353 Supco® SRL230	
ARL240	Nordyne® 626355 Supco® SRL240	
ARL250	Nordyne® 626352 Supco® SRL250	

Part No.	Replaces
ARL260	Nordyne® 626350 Supco® SRL260
ARL300	Nordyne® 626343 Supco® SRL300 Rheem®/Ruud Weatherking 47-22861-02
ARL350	Goodman® B13701-54 Supco® SRL350




SFPC FREEZE PROTECTION CONTROL STYLE

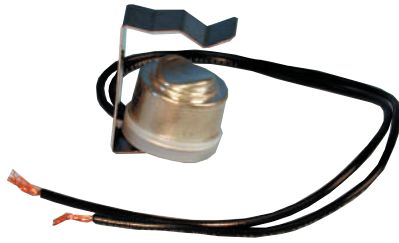

- Protects Air Conditioning Evaporator Coil from Freezing
- Opens 35°F/Close 50°F
- Fits 7/8" O.D. Tubing
- Replaces: Trol-A-Temp FPC
- Includes Clip to Fit 7/8" O.D. Tubing
- 350°F Max Ambient Temperature

Voltage (VAC)	Motor Rating (Inductive)			
	Resistive Amps	Full Load	Locked Rotor	Pilot Duty
120	10	5.8	34.8	125VA
240	5	2.9	17.4	125VA

THERMAL CUT OUTS

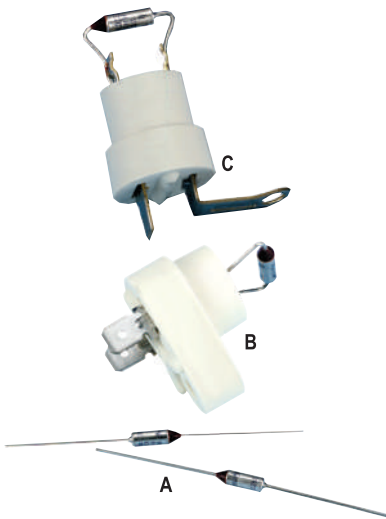

Part No.	Amp	Open Temp °C	Open Temp °F	Style	Supco®
ALC8170	25	77	170	A	STC8170
ALC4228	15	109	228	A	STC4228
ALC8242	25	117	242	A	STC8242
ALC4257	15	125	257	A	STC4257
ALC8283	15	139	283	A	STC8283
ALC4300	15	149	300	A	STC4300
ALC4333	15	167	333	A	STC4333
ALC4283	15	139	283	A	STC4283


Series 1 Maximum Wattage 1800W @ 120V/2400W @ 240
 Series 2 Maximum Wattage 1800W @ 120V/6000W @ 240

Part No.	Amp	Open Temp °C	Open Temp °F	Style	Supco®
ALC4358	15	184	363	A	STC4358
ALC4438	15	226	438	A	STC4438
ALC4468	15	242	468	A	STC4468
ALC5257	15	125	257	B	STC5257
ALC5300	15	149	300	B	STC5300
ALC5333	15	167	333	B	STC5333
ALC5377	15	192	377	B	STC5377
ALC6257	15	125	257	C	STC6257
ALC86283	25	139	283	C	STC86283
ALC6300	15	149	300	C	STC6300
ALC6333	15	167	333	C	STC6333
ALC86377	25	192	377	C	STC86377



Part No.	Description	Where Used	Supco®
A1121	2 to 1 Terminal Adapter	1/4" QC Female to 2 Male 1/4" QC Chair Terminal	
A1122	2 to 1 Terminal Adapter	1/4" QC Female to 2 Male 1/4" QC Side by Side Terminal	
A1123	Screw to Terminal Adapter	8 - 10 Stud to 1/4" QC Terminal	
A1124	Terminal to Screw Adapter	1/4" QC Female to Screw Right Angle Terminal	
A1125	2 to 1 Terminal Adapter	1/4" QC Female to 1/4" QC Male Piggyback Terminal	

SL SERIES EXACT REPLACEMENT REFRIGERATION THERMOSTATS

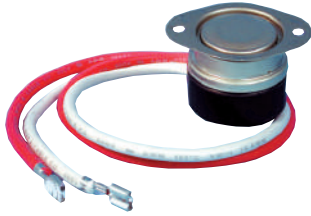

- Surface Mount
- 2-wire Heater Limit
- SPST
- Resistive Amps:25
- Volts AC:120/240
- Rated 10A@120V
- 5A@240V
- Open 55° - Close 30°

Part No.	Open (°F)	Close (°F)	Mount	Replaces
LT5708	75	40	Surface	Bohn®, Larkin, Chandler®, Climate Control® 5708L & 4752C, Supco® SL5708
LT2691	55	30		TOD, Supco® SL2691, 5303917954



- Black- Open on Rise
- Brown- Close on Rise
- Red- Common

- Surface Mount
- 3-wire Fan and Defrost Terminator
- 55°F-35°F Range
- SPDT
- Resistive Amps:25
- Volts AC:120/240

Part No.	Open (°F)	Close (°F)	Mount	Replaces
LT5709	55	35	Surface	Bohr®, Larkin®, Chandler®, Climate Control® 5709L & 4751C, Supco®, SL5709
LT79005	65	30	Surface	TOD, Russell® 103079005, Supco®, SL79005



- Tube Mount (5/8")
- 3-wire Defrost Control
- SPDT
- Resistive Amps:25
- Volts AC:120/240

Part No.	Open (°F)	Close (°F)	Mount	Replaces
LT79002	55	35	5/8" Tube	Russell® 103079002 Supco® SL79002
LT33405	70	20	5/8" Tube	TOD, Mars® 33405
LT33415	65	20	5/8" Tube	TOD, Mars® 33415
LT33430	50	35	1/2" Tube	TOD, Mars® 33430



- Tube Mount (5/8")
- 2-wire Defrost Control
- SPDT
- Resistive Amps:25
- Volts AC:120/240

Part No.	Open (°F)	Close (°F)	Mount	Replaces
LT33420	35	55	3/8" Tube	TOD, Mars® 33420
LT33425	40	25	5/8" Tube	TOD, Mars® 33425
LT33440	20	30	3/4" Tube	TOD, Mars® 33440
LT33455	20	60	5/8" Tube	TOD, Mars® 33455
LT33460	35	5	5/8" Tube	TOD, Mars® 33460
LT33475	40	20	5/8" Tube	TOD, Mars® 33475
LT33480	80	50	5/8" Tube	TOD, Mars® 33480
LT33435	20	5	3/4" Tube	TOD, Mars® 33435
LT33470	50	30	5/8" Tube	TOD, Mars® 33470





- Surface Mount
- 3-wire Defrost Control
- SPDT
- Resistive Amps: 25
- Volts AC: 120/240

Part No.	Open (°F)	Close (°F)	Mount	Replaces
ASL79005	65	30	Surface	Russell® 103079005 Supco®



- Tube Mount
- 2 Wire
- Mounting Clip fits 3/8" tube

Part No.	Open (°F)	Close (°F)	Mount	Replaces
ASL25581	45	18	Tube	Whirlpool®, Admiral®, Amana®, Crosley®, Estate®, Jenn-Air®, Kenmore®, Kitchen-Aid®, Magic Chef®, Maytag® and Supco® Roper®



ML SERIES



- Metal Case with Waterproof Epoxy Potting
- Heavy Duty Rating 10 Amps @ 120 Volts / 5 Amps @ 240 Volts
- Residential and Commercial Applications
- Switching is SPST
- Up To 1200 Watts



Part No.	Open °F	Close °F	Diff. °F	Mars®	Uniline®
ML37	37	47	10
ML45	45	20	25	33008	31-001 17001
ML50	50	20	30	33009	31-002 17003
ML55	55	20	35	33010	31-003 17005
ML60	60	20	40	33011	31-004 17007
ML70	70	20	50	33012	31-005 17009
ML80	80	50	30	33020	31-006 17011



SLT SERIES



- Metal Case with Waterproof Epoxy Potting
- Heavy Duty Rating 10 Amps @ 120 Volts / 5 Amps @ 240 Volts
- Residential and Commercial Applications
- Switching is SPST
- Rated Up To 1200 Watts
- Uses SL249 Tube Clip

Part No.	Open °F	Close °F	Diff. °F	SUPCO®
	22	45	23	SLT45
	50	10	40	SLT50
	25	55	30	SLT55



MOUNTING CLIPS



Part No.	Style	SUPCO®
ASL243	Surface / Flush Mounting Clip	SL243




Part No.	Style	SUPCO®
ASL245	Push In Mounting Clip	SL245



Part No.	Style	SUPCO®
ASL247	5/16" or 3/8" Around Tube Clip	SL247



Part No.	Style	SUPCO®
ASL249	5/16" & 3/8" Side Tube Clip	SL249



Longterm® element assemblies and restring kits offer a quality option for replacement elements. Using high grade Nichrome wire, our elements are built to perform.

GE®




AL334

- 240V, 5000W
- Re-String Kit for WE11M21, WE11M23
- Fits Supco® & GE®

Replaces
WE11M23R
DE334

GE®

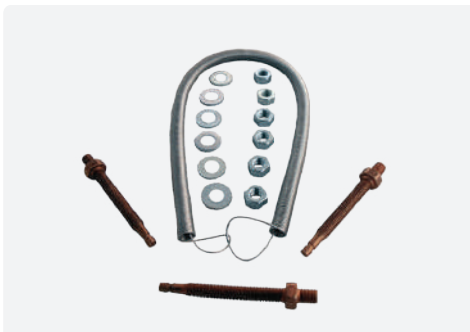


AL315

- Includes terminal bolts with nuts
- Re-String Kit - Single strand
- Also replaces WE11X260
- Fits Supco® & GE®

Replaces
WE11X60
DE315

GE®

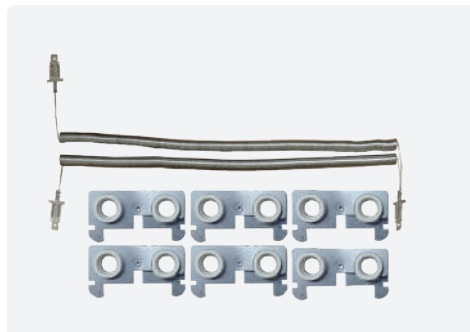


AL10007R

- 7/16" coils fit 1/2" spool
- Re-String Kit for WE25M27 and WE25M28
- Fits Supco® & GE®

Replaces
WE11X10007
DE10007R

GE®

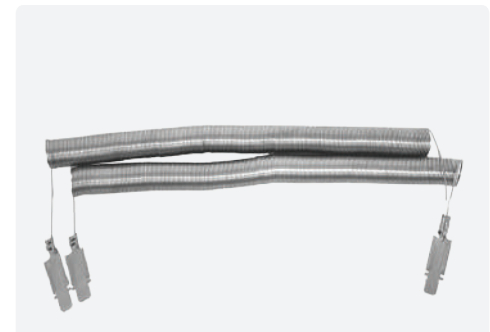

AL333

- 1/2" coils fit 5/8" spool
- Re-String Kit
- Fits Supco® & GE®

Replaces
WE11X203
DE333

LG®




AL019AC

- 240V, 5300W
- Re-String Kit for DE0019A, DC47-00019A
- Fits Supco® & GE®

Replaces
DC47-00019A
DE019AC

LG®

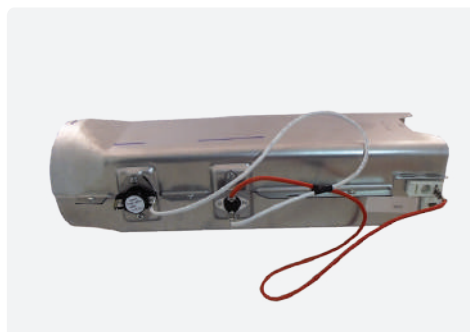


AL1001

- 240V, 5400W
- Complete assembly with housing and thermostats.
- Fits Supco® & GE®

Replaces
6931EL1001
DE1001

Samsung®

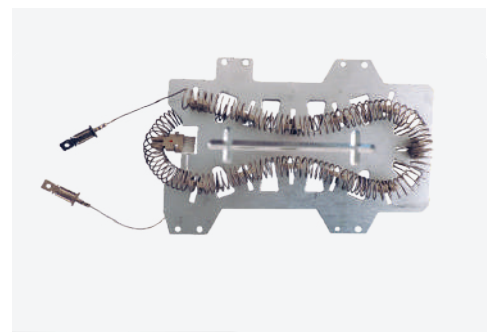

AL0019A

- 240V, 5300W
- Coil, insulators and mounting with 5/16" terminals
- Fits Supco® & Samsung® dryers

Replaces
DE0019A

Whirlpool®



AL138

- 240V, 5000W
- Complete Assembly w/housing
- Also replaces 313538
- Fits Whirlpool® & Supco® dryers

Replaces
303404
DE138

Samsung®




AL486A

- 240V, 5300W
- Complete Assembly w/housing
- Fits Samsung & Supco dryers

Replaces
DC97-14486A
DE486A

Whirlpool®

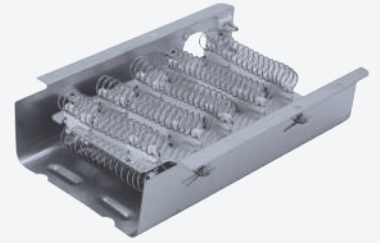

AL838

- 240V, 5400W
- Complete Assembly w/housing
- Also replaces 3398064, 3403585, 8565582, W10724237, WE11X10004
- Fits Whirlpool & Supco dryers

Replaces
279838
DE838

Whirlpool®




AL1746C

- Fits Maytag® & Supco® dryers
- Re-String Kit

Replaces
31001746C
DE1746C

Whirlpool®

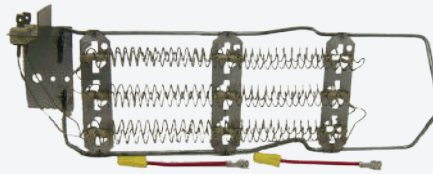


AL698

- 240V, 5200W
- Coil, insulators and mounting
- Includes harness adapter and wire nuts
- Fits Whirlpool® & Supco® dryers

Replaces
4391960
DE698

Whirlpool®

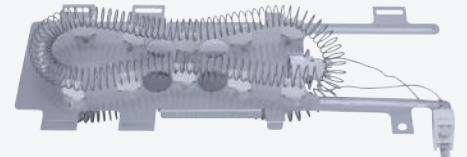


AL4771

- 240V, 5400W
- Coil, insulators and mounting
- Also replaces W10836011
- Fits Whirlpool® & Supco® dryers

Replaces
8544771
DE4771


Whirlpool®



AL148


- 240V, 4750W
- Coil, insulators and mouting with HL Thermostat
- Also replaces 31001499, 53-0180, 53-0500, 53-0919, 53-0920, 53-1641
- Fits Whirlpool® & Supco® dryers

Replaces
LA-1044
DE148

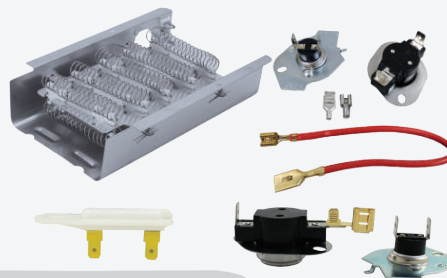


**AL838 & ALT401
& ALT197 & ALT194**

- Fits Whirlpool® dryers

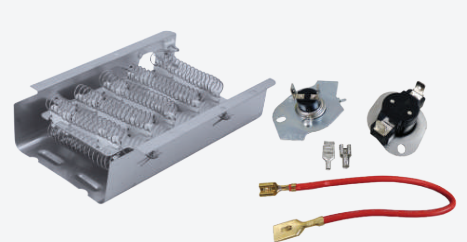


AL838 & ALT194

- Fits Whirlpool dryers

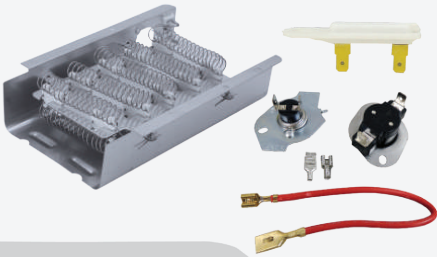


**AL838 & ALT401
& ALT194**

- Fits Whirlpool® dryers

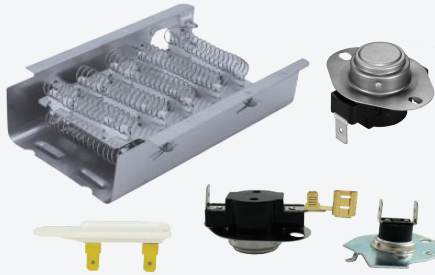


**AL838 & ALT401
& ALT197 & AL15525W**

- Fits Whirlpool® dryers

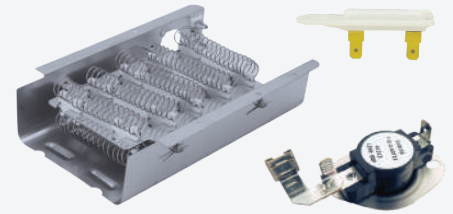

**AL838 & ALT401
& ALT185**


- Fits Whirlpool® dryers

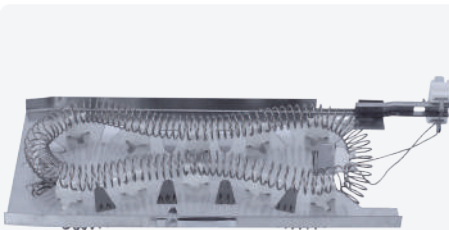

AL7747


- Fits Whirlpool® dryers

Replaces
3387747

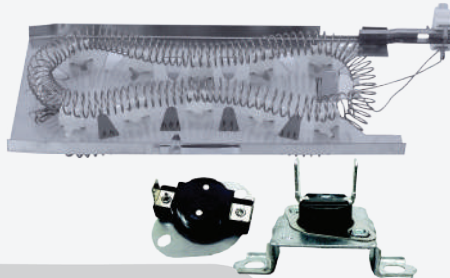


AL7747 & AL9973

- Fits Whirlpool® dryers

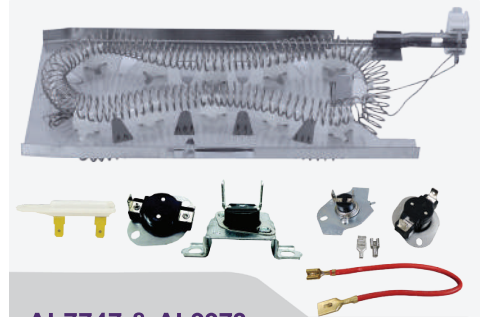


**AL7747 & AL9973
ALT401 & ALT194**

- Fits Whirlpool® dryers

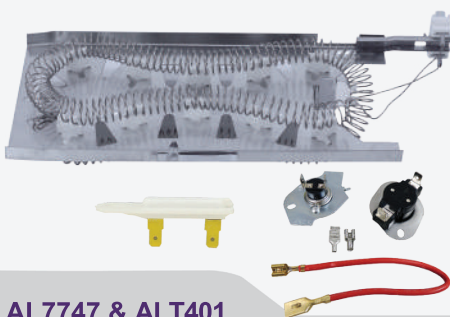


**AL7747 & ALT401
& ALT194**

- Fits Whirlpool® dryers

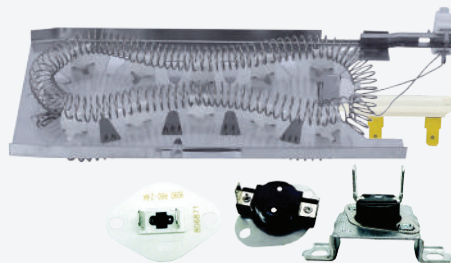


**AL7747 & AL9973
& ALT401**

- Fits Whirlpool® dryers

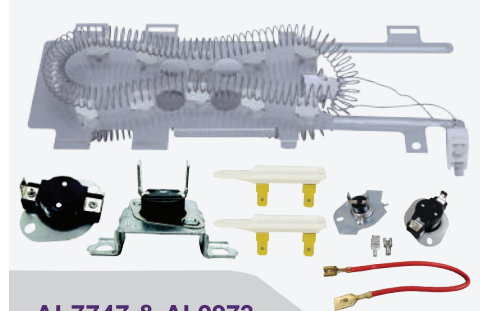


**AL7747 & AL9973
& ALT401(2pcs) & ALT194**

- Fits Whirlpool® dryers

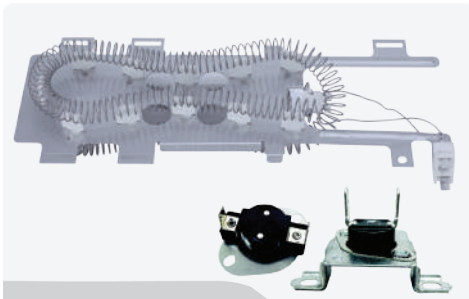

AL7747 & AL9973

- Fits Whirlpool® dryers

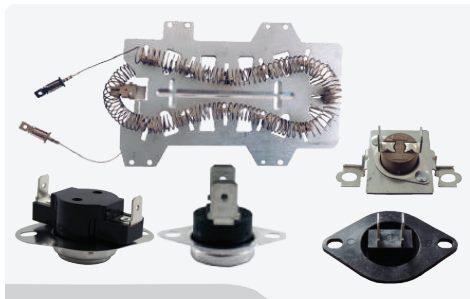

**AL0019A & AL0007A
& AL0016A & AL0018A
& AL0887A**

- Fits Whirlpool® dryers

References to original equipment manufacturers' names, models, trademarks and part numbers are used for identification purposes only and LONG TERM replacement products are not in any way affiliated, endorsed or sponsored by such original equipment manufacturers.



Longterm “AL” and “ALD” series of universal thermostats are OEM quality and built by the Original Parts Manufacturer (OPM), Thermodisc . We also offer a broad range of direct replacement thermostats, Thermal Fuses, Flame Sensors and Cutoffs.

Universal



Part No.	°Diff.	Open (°F)	Close (°F)	Supco®	Part No.	°Diff.	Open (°F)	Close (°F)	Supco®
AL120	10	120	110	L120	AL190	40	190	150	L190
AL125	10	125	115	L125	AL200	40	200	160	L200
AL130	15	130	115	L130	AL205	40	205	165	L205
AL135	15	135	120	L135	AL225	40	225	185	L225
AL140	20	140	120	L140	AL240	40	240	200	L240
AL145	20	145	125	L145	AL250	40	250	210	L250
AL150	20	150	130	L150	AL260	40	260	220	L260
AL155	20	155	135	L155	AL270	40	270	230	L270
AL160	20	160	140	L160	AL290	40	290	250	L290
AL165	20	165	145	L165	AL300	40	300	260	L300
AL170	20	170	150	L170	AL320	40	320	280	L320
AL175	20	175	155	L175	AL340	40	340	300	L340
AL180-20	20	180	160	L180-20					
AL180-40	40	180	140	L180-40					

Universal



Part No.	Description	Open (°F)	Close (°F)	Diff.	Supco®
ALD120	SPDT Thermostats	120	105	15	LD120
ALD135	SPDT Thermostats	135	120	15	LD135
ALD140	SPDT Thermostats	140	120	20	LD140
ALD145	SPDT Thermostats	145	125	20	LD145
ALD155	SPDT Thermostats	155	135	20	LD155
ALD170	SPDT Thermostats	170	150	20	LD170
ALD200	SPDT Thermostats	200	160	40	LD200
ALD225	SPDT Thermostats	225	185	40	LD225
ALD270	SPDT Thermostats	270	230	40	LD270

Electrolux®



AL87700

- Thermostat Control
- 50K OHM @ 70°
- Fits Electrolux® & Supco® dryers

Replaces
134587700
TH87700

Electrolux®



ALT406

- 220°F single blow limiter.
- Fits Electrolux® & Supco® Dryers
- Also replaces 3205659, 5303209192, WE25X10011

Replaces
134120900
SET406

Electrolux®



AL11401

- Thermal Limiter Exhaust Flush
- 180°F thermal limiter
- Fits Electrolux® & Supco® dryers
- Also replaces 134711400

Replaces
134711401
TH11401

Alliance®



ALT489

- Includes high limit and thermal fuse
- High Limit 225°F/107°C, Thermal Fuse 360°F/182°C
- Fits Alliance® & Supco® dryers
- Also replaces 61208, R0611010, R0611016

Replaces
490P3
R9900489
SET489

Whirlpool®



ALT404

- High Limit Thermostat
- L290-40°F, high limit included in SET405
- Fits Supco® Dryers

Replaces
53-1096
SET404

Whirlpool®



ALT195

- Thermostat Kit
- Includes L120-10°F, double tab, and jumper wire
- Fits Norge® & Supco® dryers

Replaces
LA-1035
SET195



AL32600

- 275°F thermal limiter
- Fits Electrolux® & Supco® dryers
- Also replaces 137060800

Replaces
137032600
TH32600



AL3001

- 260°F/127°C
- Fits LG® & Kenmore® & Supco® Dryers

Replaces
6931EL3001A
L3001



AL3001E

- 60T11 Style, 503475 L257-88 F (L125-31 C)
- Fits LG® & Kenmore® & Supco® Dryers
- Also replaces 6931EL3001C, 6931LE3001E

Replaces
6931EL3001E
SL3001E

LG®



AL3003D

- Thermal Fuse
- 140°C/284°F Fixed
- Fits LG® & Kenmore® & Supco® Dryers

Replaces
6931EL3003D
L3003D

LG®



AL3004B

- L203-59 thermostat
- Mounts on burner tube
- Fits Supco® Dryers

Replaces
6931EL3004B
SL3004B

LG®



AL3002M

- 85°C, 185°F thermal fuse
- Mounts on blower housing
- Fits Supco® Dryers

Replaces
6931EL3002M
SL3002M

LG®




AL3003

- Dryer High Limit
- 110°C/ 240°F Resettable
- Fits LG® & Kenmore® & Supco® Dryers

Replaces
6931EL3003C
L3003

Samsung®



AL0007A

- Thermistor
- 10K Ohms @ 77° F
- Fits Samsung®, Whirlpool®, Kenmore® & Supco® dryers

Replaces
DC32-00007A
DE0007A

Samsung®



AL0015A

- 250V, 25A, 320°F (160°C)
- Fits Samsung®, Whirlpool®, Kenmore® & Supco® dryers

Replaces
DC47-00015A
L0015A

Whirlpool®



AL15525W

- L155°-25 with built in heater
- Fits Whirlpool® & Supco® dryers
- Also replaces 306910, 3387135, 3387139

Replaces
3387134
L15525W

Whirlpool®



ALT198

- 60T11 Style, L250-80
- Fits Whirlpool® & Supco® dryers
- Also replaces 696397

Replaces
3390291
SET198

Samsung®



AL0016A

- 125/250V, 25A, 185°F (85°C)
- Fits Samsung®, Whirlpool®, Kenmore® & Supco® dryers

Replaces
DC47-00016A
L0016A

Samsung®



AL0018A

- 60T11 Style, 503497, L260-50F
- Fits Samsung®, Whirlpool®, Kenmore® & Supco® dryers

Replaces
DC47-00018A
L0018A

Samsung®



AL0887A

- Thermal Fuse
- 250V, 160°C, -35°C. 320°F
- Fits Samsung®, Whirlpool®, Kenmore® & Supco® dryers

Replaces
DC96-00887AR
L0887A

Whirlpool®




ALT184

- Thermal Cutoff (Includes)
- High Limit 250°F/121°C
- Thermal Fuse 360°F/182°C
- Also replaces 279548, 3387812, 3389946, 3398671, 3977394, 695563
- Fits Whirlpool® & Supco® dryers

Replaces
279769
SET184

Whirlpool®



ALT194

- Thermal Cutoff (Includes)
- High Limit 250°F/121°C
- Thermal Fuse 309°F/154°C
- Connectors and wire
- Also replaces 3399848, 3977393
- Fits Whirlpool® & Supco® dryers

Replaces
279816
SET194

Whirlpool®



AL9973

- Thermal Limit (Includes)
- High Limit 295°F/146°C
- Thermal Fuse 352°F/178°C
- Also replaces 3391913, 3404151, 3404152, 3977395, 8318314
- Fits Whirlpool® & Supco® dryers

Replaces
279973
TH9973

Whirlpool®



ALT409

- Thermal Fuse
- 243°F/117°C
- Fits Whirlpool® & Supco® dryers

Replaces
307473
SET409

Whirlpool®



ALT196

- L145-25°F, double tab, one side.
- Fits Norge® & Supco® Dryers
- Also replaces 35-1107, 53-0171, 53-0263, 53-0700, 53-1095, 53-1107

Replaces
53-1107
SET196

Whirlpool®



ALT401

- 196°F single blow fuse with 3/16" spade connectors
- Fits Whirlpool® & Supco® Dryers
- Also replaces 3388651, 3392519, 694511, 80005, WE4X857

Replaces
3392519
SET401

Whirlpool®



ALT410

- Thermal Cutout
- 196°F single blow fuse with 1/4" spade connectors
- Fits Whirlpool® & Supco® Dryers

Replaces
3399849
SET410

Whirlpool®



ALT402

- Thermal Fuse
- 190°F/88°C
- Fits LG® & Kenmore® & Supco dryers
- Also replaces 279650, 3389639, 3389640, 3390719, 660877, 688841, 690198, 690798

Replaces
3390719
SET402

Whirlpool®




ALT197

- High Limit 250°F/121°C
- Thermostat only
- Also replaces 3399693

Replaces
3977767
SET197

Whirlpool®



AL7274

- Exhaust Thermistor Sensor
- 10K Ohms @ 70°F
- Fits Whirlpool® & Supco dryers
- Also replaces 3390292, 3406294, 3976615, 772546, 8577274

Replaces
8577274
TH7274

Whirlpool®



AL14625W

- L146°- 25 with built in heater
- Fits Whirlpool® & Supco® dryers

Replaces
31001192
L14625W

Whirlpool®



ALT407

- Thermal fuse
- 183°F/84°C
- Fits Whirlpool® & Supco® dryers

Replaces
33001762
SET407

Whirlpool®



ALT176

- 60T11 Style, L248-80
- Fits Whirlpool® & Supco dryers
- Also replaces 696397

Replaces
53-0771
SET176

Whirlpool®



ALT403

- Thermal Cutoffs
- L300°F/149°C from SET405
- High Limit for Norge® & Supco Dryers

Replaces
53-1182
SET403

Whirlpool®



ALT405

- Thermal Cutoffs
- 258°F/126°C, 240°F/116°C (Gas), 300°F/149°C (Electric)
- Includes high limit, thermal fuse for gas and one for electric
- Fits Supco® Dryers

Replaces
LA1053
SET405

Whirlpool®




ALT149

- L290-40°F, female connector on one side and male on other
- Also replaces 279276, 342761, 342762, 342763, 342764, 660099, 660739, 685828, 688012, 688471, 688476, 689234, 689235
- Fits Supco® Dryers

Replaces
279054
SET149


Whirlpool®

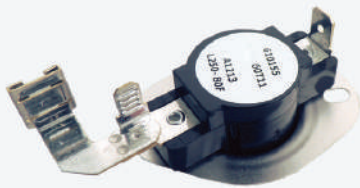

ALT185


- High Limit 250°F/121°C, and 360°F Thermal Fuse
- Fits Whirlpool® & Supco® dryers

Replaces
397767
SET185

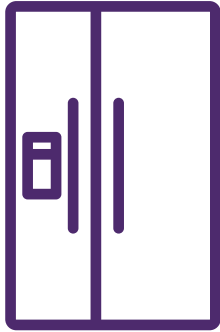

Whether Universal or direct replacement, Longterm® defrost heaters are designed to meet or exceed OEM specifications for superb performance and reliability. Our offering includes those constructed from heavy duty Vycor® glass or high quality 840 Incoloy all with end seals of high temperature molded silicone. All are manufactured to proper lengths, mountings and electrical OEM specifications.

Electrolux®

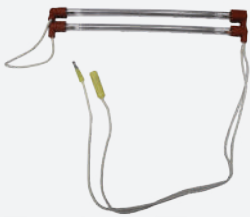

AL264

- 9.25" length, 115V, 550W
- Fits Electrolux® & Supco® built refrigerators

Replaces
5300625331
SH264

Electrolux®



AL419

- Dimensions: 20.25" x 3.125"
- Fits Electrolux® & Supco® built refrigerators

Replaces
5303001362
SH419

GE®



AL9393

- Length: 6.25"
- Fits GE® & Supco® built refrigerators

Replaces
WR2X9393
EC9393

GE®



AL271

- 9.375" length, 115V, 600W
- Fits GE® & Supco® built refrigerators
- Also replaces WR49X249

Replaces
WR49X391
SH271

GE®



AL10031

- 9.5" length, 115V, 575W
- Fits GE® & Supco® built refrigerators
- Kit includes bracket, harness, and defrost thermostat

Replaces
WR51X10031
SH10031

GE®




AL10038

- 21" length, 115V, 375W
- Fits GE® & Supco® built refrigerators

Replaces
WR51X10038
SH10038

GE®

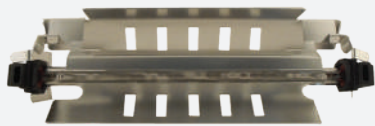

AL324

- 9.50" length, 115V, 575W
- Fits GE® & Supco® built refrigerators

Replaces
WR51X10053
SH324

GE®



AL323

- 12.00" length, 115V, 725W
- Fits GE® & Supco® built refrigerators

Replaces
WR51X10055
SH323

GE®



AL325

- 9.50" length, 115V, 575W
- Fits GE® & Supco® built refrigerators

Replaces
WR51X10101
SH325

GE®



AL307

- 23.4375" length, 115V, 425W
- Fits GE® & Supco® built refrigerators
- Also replaces WR51X194, WR51X1414, WR51X211, WR51X414

Replaces
WR51X411
SH307

GE®



AL261

- 21.9375" length, 115V, 550W
- Fits GE® & Supco® built refrigerators
- Also replaces WR51X169

Replaces
WR51X412
SH261

GE®




AL308

- 15.25" length, 115V, 450W
- Fits GE® & Supco® built refrigerators
- Also replaces WR51X5203

Replaces
WR51X413
SH308

GE®

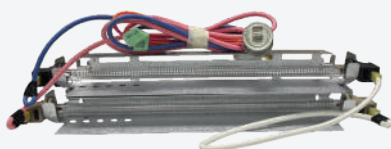


AL309

- 9.50" length, 115V, 600W
- Fits GE® & Supco® built refrigerators

Replaces
WR51X442
SH309

GE®

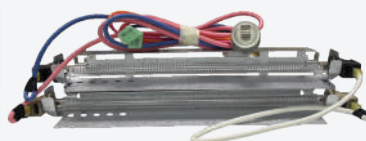

AL310

- 12.8125" length, 115V, 772W
- Fits GE® & Supco® built refrigerators
- Also replaces WR51X344, WR51X345, WR51X372, WR51X443, WR51X461

Replaces
WR51X443
SH310

Whirlpool®



AL267

- 23.8125" length, 115V, 500W
- Fits Maytag® & Supco® built refrigerators
- Also replaces 527633, 527639

Replaces
527631
SH267

Whirlpool®




AL442

- Dimensions: 18.625" x 9.3125"
- Fits Whirlpool® & Supco® built refrigerators

Replaces
851363
SH442

Whirlpool®

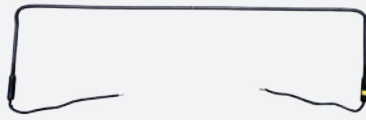

AL413

- Dimensions: 23.625" x 6.25"
- Fits Whirlpool® & Supco® built refrigerators

Replaces
978331
SH413

Whirlpool®



AL319

- 17.875" length, 115V, 400W
- Fits Maytag® & Supco® built refrigerators
- Also replaces 601061, 601019

Replaces
60106-34
SH319


Whirlpool®



AL320

- 20.4375" length, 115V, 450W
- Fits Maytag® & Supco® built refrigerators
- Also replaces 6010614, 6010617, 6010623, 6010626

Replaces
60106-35
SH320

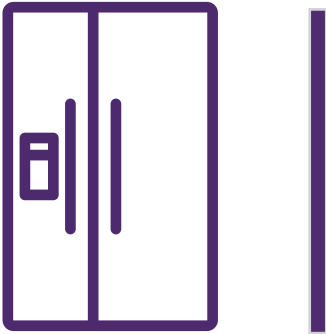

Longterm® exact replacement defrost thermostats are built for heavy-duty electrical loads. They are all UL® recognized. The Universal ML-Series from Original Parts Manufacturer, Thermodisc® offers proven reliability in a moisture resistant sealed design.

Electrolux®



AL6600

- L47-25, 6" female bullet lead, 4" male bullet lead.
- Fits Electrolux® & Supco® Frost Free Freezers
- Also replaces 216731000, 216872200, 218673001, 218673008, & more

Replaces
297216600
SL6600

Electrolux®



ALPC

- Open 35° , Close 50° 15° Diff.
- Rated 10A@120V, 5V@240V 12" Leads
- Fits Electrolux® & Supco® Frost Free Freezers

Replaces
5303279149
SFPC

Electrolux®



AL2690

- Rated 10A@120V, 5A@240V
- Open 47° - Close 22°
- Also replaces 08000805, 08000073, G162690-1
- Fits Electrolux® & Supco® Frost Free Freezers

Replaces
5303917625
SL2690

Electrolux®



AL2691

- Rated 10A@120V, 5A@240V
- Open 55° - Close 30°
- Also replaces WR50X55 Fits Electrolux® & Supco® Frost Free Freezers

Replaces
5303917954
SL2691

GE®



AL10025

- Rated 10A@120V, 5A@240V
- Open 58° - Close 30°
- Also replaces WR9M417
- Fits GE® & Supco® built refrigerators

Replaces
WR50X10025
SL10025

GE®



AL10068

- Open: 140°, Close: 110°, 30° Diff.
- Fits GE® & Supco® built refrigerators
- Also replaces WR50X10079, WR50X10075, WR50X10074

Replaces
WR50X10068
SL10068

GE®



AL10071

- Open: 64°, Close: 23°, 41° Diff.
- Fits GE® & Supco® built refrigerators
- Also replaces WR50X10076, WR50X10021

Replaces
WR50X10071
SL10071

GE®



AL10073

- L64-41°F, with tube mount clips
- Fits GE® & Supco® Refrigerators
- Open 64° - Close 23°
- Also replaces WR50X10078

Replaces
WR50X10073
SL10073

GE®



AL50122

- Rated 10A@120V, 5A@240V
- Open 60° - Close 28°
- Also replaces WR50X128
- Fits Whirlpool® & Supco® built refrigerators

Replaces
WR50X122
SL50122

GE®



AL50129

- Rated 10A@120V, 5A@240V
- Open 50° - Close 20°
- Also replaces WR50X117, WR50X11
- Fits GE® & Supco® built refrigerators

Replaces
WR50X129
SL50129

Whirlpool®



AL2697

- Rated 10A@120V, 5A@240V
- Open 70° - Close 12°
- Also replaces 482290
- Fits Whirlpool® & Supco® built refrigerators

Replaces
4387489
SL2697

Whirlpool®



AL7490

- Rated 10A@120V, 5A@240V
- Open 48° - Close 18°
- Also replaces 9791823, 2176941, 2183073
- Fits Whirlpool® & Supco® built refrigerators

Replaces
4387490
SL7490

Whirlpool®



AL3084

- Rated 10A@120V, 5A@240V
- Open 50° - Close 25°
- Also replaces 483084
- Fits Whirlpool® & Supco® built refrigerators

Replaces
4387499
SL3084

Whirlpool®



AL7503

- Rated 10A@120V, 5A@240V
- Open 44° - Close 18°
- Also replaces 4343917, 2221677, 2149641, 2182380, 2183072
- Fits Whirlpool® & Supco® built refrigerators

Replaces
4387503
SL7503

Whirlpool®




AL8510

- Rated 10A@120V, 5A@240V
- Open 40° - Close 10°
- Also replaces 52085-1
- Fits Whirlpool® & Supco® built refrigerators

Replaces
52085-10
SL8510

Whirlpool®



AL8515

- Rated 10A@120V, 5A@240V
- Open 55° - Close 15°
- Also replaces 52085-11
- Fits Whirlpool® & Supco® built refrigerators

Replaces
52085-15
SL8515

Whirlpool®



AL8519

- Rated 10A@120V, 5A@240V
- Open 80° - Close 31°
- Fits Whirlpool® & Supco® built refrigerators

Replaces
52085-19
SL8519

Whirlpool®



AL8528

- Rated 10A@120V, 5A@240V
- Open 47° - Close 15°
- Also replaces 69408966
- Fits Whirlpool® & Supco® built refrigerators

Replaces
52085-28
SL8528

Whirlpool



AL25581

- Rated 10A@120V, 5A@240V
- Open 45° - Close 18°
- Also replaces W10260437, 4387498, 2321799
- Fits Whirlpool® & Supco® built refrigerators

Replaces
W10225581
SL25581

Whirlpool®



AL2411

- Rated 10A@120V, 5A@240V
- Open 55°, Close 35°
- Also replaces 10442402, 10442407, 10442411, 4344231, 8170725
- Fits Whirlpool® & Supco® built refrigerators

Replaces
WP10442411
SL2411

Universal



Part No.			Replace
	Open: 37°, Close: 47°, 10° Diff.	Rated 10A@120V, 5V@240V	12" Leads ML37
	Open: 45°, Close: 25°, 20° Diff.	Rated 10A@120V, 5V@240V	12" Leads ML45
	Open: 50°, Close: 30°, 20° Diff.	Rated 10A@120V, 5V@240V	12" Leads ML50
	Open: 55°, Close: 35°, 20° Diff.	Rated 10A@120V, 5V@240V	12" Leads ML55
	Open: 60°, Close: 40°, 20° Diff.	Rated 10A@120V, 5V@240V	12" Leads ML60
	Open: 70°, Close: 50°, 20° Diff.	Rated 10A@120V, 5V@240V	12" Leads ML70
	Open: 80°, Close: 50°, 30° Diff.	Rated 10A@120V, 5V@240V	12" Leads ML80
	3-pack of mounting clips	Surface mount style	SL243
	3-pack of mounting clips	Push-on style	SL245
	3-pack of mounting clips	Snap-on style	SL247
	3-pack of mounting clips	Tube mount style	SL249

GE®



AL10025

- Includes 18" leads
- Fits GE® & Supco® refrigerators
- Also replaces over 20 other part numbers

Replaces
WR55X10025
TH10025

LG®



AL2001A

- Refrigerator temperature sensor
- Fits LG® & Supco® refrigerators
- Also replaces 1330960

Replaces
4781JK2001A
TH2001A

LG®




AL2002A

- Refrigerator temperature sensor
- Fits LG® & Supco® refrigerators
- Also replaces 6615JB2002F

Replaces
6615JB2002A
TH2002A

LG®




AL2002X

- Refrigerator temperature sensor
- Fits LG® & Supco® refrigerators
- Also replaces 2651043

Replaces
6500JB2002X
TH2002X

LG®



AL2005A

- Refrigerator temperature sensor
- Fits LG® & Supco® refrigerators
- Also replaces 1268258

Replaces
6615JB2005A
TH2005A

LG®



AL2005C

- Refrigerator defrost thermostat
- Fits LG® & Supco® refrigerators
- Also replaces 1268258

Replaces
6615JB2005C
TH2005C

LG®



ALJB001B

- Refrigerator humidity sensor
- Fits LG® & Supco® refrigerators
- Also replaces 1268225, 6500JB1005J, 6500JK1003A

Replaces
6500JB2001B
THJB001B

LG®



ALJB002T

- Refrigerator temperature sensor
- Fits LG® & Supco® refrigerators
- Also replaces 6500JK1004A

Replaces
6500JB2002T
THJB002T

Samsung®



AL0006S

- Defrost system temperature sensor
- Fits Samsung® & Supco® refrigerators
- Also replaces 2030281

Replaces
DA32-00006S
TH0006S

Samsung®



AL0006W

- Defrost system temperature sensor
- Fits Samsung® & Supco® refrigerators
- Also replaces DA32-00006B, DA32-00006C, DA32-00006D, DA32-00006L, DA32-00006M

Replaces
DA32-00006W
TH0006W

Samsung®




AL0095E

- Fridge/Freezer Thermal Fuse
- Fits Samsung® & Supco® refrigerators
- Also replaces DA47-10148J, DA47-10148B, DA47-10148D

Replaces
DA47-00095E
TH0095E

Samsung®

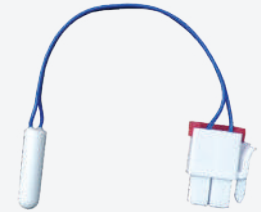

AL0105H

- Defrost system temperature sensor
- Fits Samsung® & Supco® refrigerators
- Also replaces 2030337

Replaces
DA32-10105H
TH0105H

Samsung®




AL0105T

- Defrost system temperature sensor
- Fits Samsung® & Supco® refrigerators
- Also replaces 1515200

Replaces
DA32-10105T
TH0105T

Samsung®



AL0150E

- Defrost system bimetal thermostat
- Fits Samsung® & Supco® refrigerators
- Also replaces 2031667

Replaces
DA47-10150E
TH0150E

References to original equipment manufacturers' names, models, trademarks and part numbers are used for identification purposes only and LONGTERM® replacement products are not in any way affiliated, endorsed or sponsored by such original equipment manufacturers.

Universal



A15

- Copper Ice Maker Kit w/ Self-Tapping Valve
- Includes valve, 15' copper tubing 1/4"OD, and fittings

Universal

Universal



A25

- Copper Ice Maker Kit w/ Self-Tapping Valve
- Includes valve, 25' copper tubing 1/4"OD, and fittings

Universal

Universal



AL25

- Plastic Ice Maker Kit
- Includes valve, 25' of 1/4" plastic tubing and fittings.

Universal

Universal



AL25E

- Economy Ice Maker Kit
- Includes valve, 25' of 1/4" plastic tubing and fittings.

Universal

Universal



AL2404

- Brass Adapter
- Angled 90° fitting to reduce stress on tubing
- Connection 3/4" MHT to 1/4" compression

Universal



KST200 SERIES controls are designed to meet the high electrical capacity requirements of electric water heaters. The speed and force of contact separation provides long-dependable control life at high electrical loads.
Approval: UL, CUL

Universal



KSD207R

- DPST Manual reset
- Open temperature: Max 266°F(130°C)
- Standard differential: 9°F
- Also replaces Therm-O-Disc®

Replaces
66TM DPST
66T

Universal



KSD207RD

- DPST Manual reset
- Open temperature: Max 266°F(130°C)
- Standard differential: 9°F
- Also replaces Therm-O-Disc®

Replaces
66TM DPST
66T

Universal



KSD208R

- DPST Manual reset
- Open temperature: Max 266°F(130°C)
- Standard differential: 9°F
- Also replaces Therm-O-Disc®

Replaces
66TM DPST
66T

Universal



KST200

- SPST
- Approximate adjust.range: 60°F(33°C)
- Standard adjustable temperature range: 90°-150°F(32°C)
- Open temperature: Max 200°F(93°C)Min 90°F(32°C)
- Standard differential: 3-9
- Also replaces Therm-O-Disc®

Replaces
59T SPST

Universal



KST201

- SPDT
- Approximate adjust.range: 60°F(33°C)
- Standard adjustable temperature range: 90°-150°F(32°C)
- Open temperature: Max 200°F(93°C)Min 90°F(32°C)
- Standard differential: 9-14
- Also replaces Therm-O-Disc®

Replaces
59T SPST

Universal




KST202

- SPST+DPST
- Approximate adjust.range: 60°F(33°C)
- Standard adjustable temperature range: 90°-150°F(32°C)
- Open temperature: Max 200°F(93°C)Min 90°F(32°C)
- Standard differential: 9-14
- Also replaces Therm-O-Disc®

Replaces
59T SPST
66T DPST


Universal

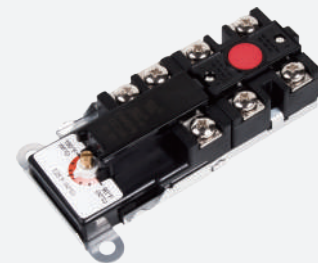

KST203

- SPDT+DPST
- Approximate adjust.range: 60°F(33°C)
- Standard adjustable temperature range: 90°-150°F(32°C)
- Open temperature: Max 200°F(93°C)Min 90°F(32°C)
- Standard differential: 9-14
- Also replaces Therm-O-Disc®

Replaces
59T SPDT
66T DPST



Sequencers are field-proven devices for controlling the operation of heating elements or fans in electric furnaces and heat pumps. These controls combine a solid-state positive temperature coefficient (PTC) provide time-delayed electrical switching. A wide variety of bimetal disc and PTC combinations are available to provide a broad range of timings. Applications: Electric furnaces, Baseboard heaters, Duct heaters, Suspension heaters, Heat pump blower and heating element control etc. Approval: UL, CUL

Universal



KSD015

- 24/120/240VAC, SPST
- Applications: Electric Furnaces, Heat Pumps, Gas Furnaces, etc.



Universal



KSD015W

- 24/120/240VAC, SPST
- Applications: Electric Furnaces, Heat Pumps, Gas Furnaces, etc.



Universal



KSD016

- 24/120/240VAC, DPST
- Applications: Electric Furnaces, Heat Pumps, Gas Furnaces, etc.



Universal



KSD016W

- 24/120/240VAC, DPST
- Applications: Electric Furnaces, Heat Pumps, Gas Furnaces, etc.



Universal



KSD016X

- 24/120/240VAC, DPST+SPST
- Applications: Electric Furnaces, Heat Pumps, Gas Furnaces, etc.



Universal



KSD030

- 24/120/240VAC, 2*SPST
- Applications: Electric Furnaces, Heat Pumps, Gas Furnaces, etc.



Universal



KSD031

- 24/120/240VAC, DPST+SPST
- Applications: Electric Furnaces, Heat Pumps, Gas Furnaces, etc.



Universal



KSD032

- 24/120/240VAC, 2*DPST
- Applications: Electric Furnaces, Heat Pumps, Gas Furnaces, etc.



Universal



KSD033

- 24/120/240VAC, 2*DPST+SPST
- Applications: Electric Furnaces, Heat Pumps, Gas Furnaces, etc.



Electric Water Heater Tune-Up kit Features: Repair Kit Plumber's Pack
 Electric Water Heater Tune-Up kit provides a quick and easy way to repair the most common items on an electric water heater. The tune up kit helps prolong the life of your water heater by renewing the key electrical components of your water heater.

Universal



EWH-01

- Two 4500 Watt, 240 volt copper elements
- Screw-in elements with gaskets
- One Lower Thermostat
- One Upper Thermostat

Universal



EWH-02

- (2) Includes thermostat protectors
- (2) 240v, 4500w copper elements
- (2) Elements gaskets
- (1) Upper thermostat
- (1) Lower thermostat


Universal



WH-01

- High Watt Density heating element
- 240V/4500W
- UL Listed
- Easy to Install
- Minimum tank diameter 15"

Universal

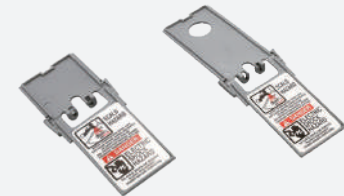

**KSDP200
KSDP203**

- Thermostat Plastic Terminal Protector
- Helps protect from electric shock
- It is carded